


Central Park Fieldhouse

Orange, NJ

May 2022

PAC4mod – CFP#3335

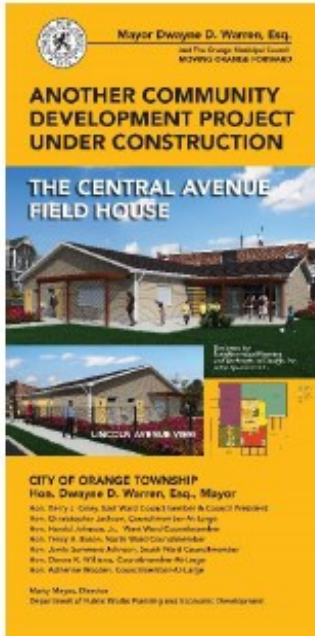

The City of Orange was over budget while bidding site-built construction of a new fieldhouse for their Central Park baseball field complex. As the project was about to be cancelled due to budget overruns, George Ely Associates provided the city with pricing on a Cedar Forest Products pre-cut Timber Wall system and complete building envelope package that allowed the project to continue. While the building was designed to provide restrooms, locker rooms, concession kitchen, and a maintenance shop, the buildings primary function transitioned into office space and food pantry during the 2020 pandemic.

Building Features:

- Custom cedar pergolas
- 2x common trusses with attic
- 4" x 8" Northern White Cedar exterior walls with insulation
- 1x8 T&G pine interior wall planking
- Drywall interior wall by others
- FRP white pebble finish restroom utility wall
- ADA compliant restroom design
- 18 GA steel exterior door with hardware
- Vitreous China Plumbing Package*
- Electrical Package*